



Instruction Manual

Scrubmaster B90 CL (7062.30/.40/.41/.42/.43)

Introduction

Preface

Dear customer, It is our desire that the good characteristics of the Scrubmaster B 90 CL should justify the confidence you demonstrated by making this purchase. Prior to the first use, read the chapter "Safety Information" carefully as this will ensure safe operation of the machine. Your own safety, as well as the safety of others, depends to a great extent on how the machine is moved and operated. Before using the equipment for the first time, read this original manual thoroughly, act according to the information contained and keep it in a safe place for future reference or subsequent owners. The manual provides valuable information about operation, service and maintenance. The warning symbols as used in this manual identifies items relevant to safety. Please observe the safety provisions (see chapter "Safety Information"). Your authorized Hako dealer will be pleased to answer further questions regarding the machine or the operation and maintenance manual.

Please be advised explicitly that we cannot accept any legal issues out of the contents of this manual. If repair work has to be performed make sure that only genuine spare parts are used; only genuine spare parts may guarantee a dependable machine. We reserve the right for technical improvement..

Valid as of: April 2014

Hako GmbH
D-23843 Bad Oldesloe
Hamburger Str. 209-239
Telefon ++49 (04531) 8060

Proper use

The Schrubmaschine is for attachment to the Scrubmaster B90 CL. The Scrubmaster B90 CL is a vacuum scrubbing machine for wet cleaning of hard-surfaced floors. Using the equipment beyond this scope of application will be deemed improper use; The manufacturer cannot be held liable for consequential damages; the user alone bears the risk.

The term of proper use also includes operation, maintenance and repair work to be performed in compliance with the manufacturer's specifications.

The Schrubmaschine may only be used by persons that are familiar with the machine and aware of possible hazards involved. The applicable Accident Prevention Regulations and further regulations in vigour concerning aspects of safety and working medicine will have to be complied with. If modifications to the Schrubmaschine are made in absence of the manufacturer's prior consent, the latter cannot be held liable for damage resulting from such unauthorized modification.

Introduction

Notes on warranty

The terms of the sales contract apply. Damages are not subject to warranty if they are due to non-compliance with the maintenance and service provisions. The maintenance work has to be performed by an authorized Hako service center and confirmed in the "Maintenance certificate" which is the warranty document.

The following is excluded from warranty: fuses, natural wear, damages caused by overload, inexpert handling and unauthorized modification of the machine. Moreover, any claim for warranty cannot be accepted if damages of the machine are caused by fitting parts or accessories without Hako's prior and explicit consent or by non-compliance with the maintenance instructions.

Acceptance of the machine

Upon arrival, check machine for possible damages in transit. For refund of such damage, have the Deutsche Bahn AG or your freight forwarder confirm such damage. Mail notification and waybill to:

Hako GmbH
Hamburger Strasse 209-239
23843 Bad Oldesloe

Table of Content

Introduction	2	3.1.2 Fresh Water Tank	12	5.5.2 Empty Fresh Water Tank . . .	32
Preface	2	3.1.3 Squeegee	13	5.5.3 Clean Fresh Water Filter . . .	32
Proper use	2	3.1.4 Soiled Water Tank	13	5.6 Soiled Water Tank	33
Notes of warranty	3	3.1.5 Travel Drive	13	5.6.1 Empty Soiled Water Tank . .	34
Acceptance of the machine . . .	3	3.1.6 Batteries and Charger	13	5.6.2 Clean Soiled Water Tank . . .	34
1 Safety information	5	3.1.7 Options	13	5.6.3 Clean Suction Filter	34
1.1 Safety and Warning Symbols .	5	3.2 Operating and Indicating Ele-	14	5.7 Plate brush head	35
1.2 General Provisions	6	ments	14	5.7.1 Clean Brushes	35
1.3 Provisions for Operation	6	3.2.1 Operating Panel	14	5.7.2 Change Brushes	35
1.4 Maintenance instructions	7	3.2.2 At the machine	18	5.7.3 Change Deflector Roller	35
1.5 Specific Hazards	8	4 Technical Data	21	5.7.4 Change Sealing Strip	35
1.6 Information for Protection of En-	8	5 Maintenance and Care	23	5.8 Roll brush head	36
vironment	8	5.1 Hako System Maintenance . .	23	5.8.1 Clean dirt hopper	36
1.7 Labels at the Machine	9	5.2 Maintenance document	24	5.8.2 Remove brushes	36
2 First Operation	10	5.3 Maintenance Schedule	24	5.8.3 Clean brushes	36
2.1 Instruction	10	5.4 Battery Systems	29	5.8.4 Fit brushes	36
2.2 Initial charging procedure . . .	10	5.4.1 Charge Batteries	30	5.8.5 Change deflector roller	36
2.3 Before Taking into Operation	10	5.4.2 Low Discharge Signal sender	30	5.9 Squeegee	37
2.4 Start Machine	10	(LDS)	30	5.9.1 Clean Squeegee	37
2.5 Operation	11	5.4.3 Maintenance of Drive	30	5.9.2 Change Sealing strips	37
2.6 Stop Machine	11	Batteries	30	5.9.3 Adjust Sealing strips	38
2.7 After Work	11	5.4.4 Remove Batteries	30	EC-Declaration of Conformity	
2.8 Transport rides	11	5.4.5 Install Batteries	30	41
3 Operation	12	5.4.6 Disposal of Batteries	30		
3.1 Method of operation	12	5.5 Fresh Water Tank	31		
3.1.1 Brush Head	12	5.5.1 Fill Fresh Water Tank	32		

Safety information

1 Safety information

1.1 Safety and Warning Symbols

All paragraphs in this manual referring to your personal safety, the safety of your machine and the environment protection are attributed one of the following warning symbols:

Symbol	Hazardous for ...	Description
Safety Provisions 	persons and goods	Safety Provisions in dangerous situation caused by misuse inaccurate adherence of instructions or prescribed work routine.
CAUTION 	the machine	important information on handling the machine in order to maintain operability.
Ecological hazard 	the environment	due to use of substances representing an inherent danger to health of environment

Safety information

1.2 General Provisions

- Apart from the provisions contained in this instruction manual, the general safety provisions and the accident prevention regulations as imposed by law have to be complied with.
- Before taking your machine into operation, carefully read the instruction manual as well as other separate instructions for accessories or attached implements and comply with all points mentioned there during work.
- Persons being trained by qualified Hako technicians only are authorised to operate, service and repair the machine.
- You are advised to thoroughly study the safety instructions since precise knowledge only helps avoiding errors during operation of the machine and thus guarantee faultless usage of the machine.
- The operating instructions have to be at hand at the place of use of the machine, and therefore have to be kept readily available at the machine.
- When selling or letting the machine for rent, hand out these documents

to the new owner/operator and have the transfer certified!

- The warning and instruction plates attached to the machine contain valuable advice about safe operation. Immediately replace incomplete or illegible labels.
- As far as safety standards are concerned, spare have to equal genuine spare parts!

1.3 Provisions for Operation

- Before first operation of the machine, fully charge the battery with an initial charging procedure and comply with the operating instructions of the charger as well as with those of the battery manufacturer. Hako cannot be held liable for damages resulting from an insufficient initial charge.
- Before taking into operation, check the machine for operational safety! Immediately remedy malfunctions!
- It is indispensable for the operator to get acquainted with all attached implements and controls as well as with their function before operation begins. Once you have started to work, no time will be left to do so!
- When working with the machine use

firm and skid proof shoes.

- The machine may be used only on such surfaces clearly specified by the owner or his authorised representative.
- When working with the machine, pay strict attention to any persons in the close vicinity.
- Start moving immediately after the brush head has switch on otherwise the brush might leave traces on the floor. Lift the brush head before moving over obstacles (doorsteps).
- Use only cleaning agents suitable for automatic machines (low-foaming) and comply with the instructions for use, disposal and with the warning information specified by the cleaning agent's manufacturer.
- Only fold open empty soiled water tank.
- The machine is not designed for collecting hazardous, inflammable or explosive dusts or substances.
- Usage of the machine in explosive areas is prohibited.
- Pull the switching key to avoid unauthorized use of the machine.
- Before transport of the machine, lift the squeegee and the brush head.

Safety information

Adapt driving habits to local conditions.

- The machine may be used only for operation on plane areas with a maximum inclination of up to 10 %.

1.4 Maintenance instructions

- The daily and weekly maintenance and repair task must be performed by a qualified operator. For any further maintenance and repair work beyond please contact your local Hako service center.
- Observe the maintenance activities and intervals set out in the instruction manual.
- Maintenance and repair work may be carried out only by means of appropriate tools.
- Have the machine checked for safe condition in the sense of the Accident Prevention Regulation by an expert at regular intervals (recommendation: at least once yearly) as well as after modifications or repair.
- Spare parts have to equal the technical requirements as specified by the manufacturer! Genuine spare parts guarantee compliance with these requirements.

- Switch off the engine and remove the key before inspecting the machine or performing any maintenance work.
- To prevent the machine from being used by unauthorized persons, the control key must be removed.
- When performing work at the electrical system, be sure to disconnect the battery plug.
- Make sure to protect the soiled water tank against accidental closing or tilting down before working in the area of a lifted tank lid.
- Do not clean the electrical parts by means of high-pressure cleaning equipment.
- The use of aggressive detergents is not admitted.
- Let the machine dry after cleaning e.g. for weekend.
- The machine may be taken into operation after all protective devices have been fitted and positioned.

1.5 Specific Hazards

Electric system

- Only use genuine fuses with the specified ratings.
- In case of malfunction of the electric

system, immediately shutdown machine and remedy.

- Only qualified personnel are authorized to work on the electrical installations and only according to electro-technical rules.
- Inspect/check the electrical equipment of the machine at regular intervals. Clear up any defects immediately, such as loose connections or damaged cables.

Battery

- Respect the operating instructions of the battery manufacturer.
- Never place metal objects or tools on batteries - short-circuit hazard!
- Due to alteration of the centre of gravity, only use batteries as released and at the prescribed position only.
- Only charge batteries in areas with sufficient ventilation. – Explosion hazard!
- Refer to safety provisions in supplement 88-60-2556 - Information on drive batteries.

Safety information

1.6 Information for Protection of Environment

- For safe use of substances inheriting a danger to health and environment specific knowledge is required.
- Observe the legal directives and local regulations for disposal of detergents, see Water Management Act.
- Used batteries labelled as recyclable contain reusable economic goods. According to the crossed dustbin label these batteries must not be added to the normal waste. Provide for agreement with the Hako contract dealer on return and disposal according to § 8 BattV.


Safety information

1.7 Labels at the Machine


The following safety and information labels are legibly attached to the machine. Replace missing or illegible labels immediately.

Hako nameplate (Fig. 1/1)

Machine identification number (Fig. 1/2)



Soiled water drain hose (Fig. 1/3)



A = Read and observe the instruction manual (Fig. 1/2)

B = Maximum inclination of 10% (Fig. 1/2)

C = Do not clean the machine by means of high-pressure cleaning equipment (Fig. 1/2)

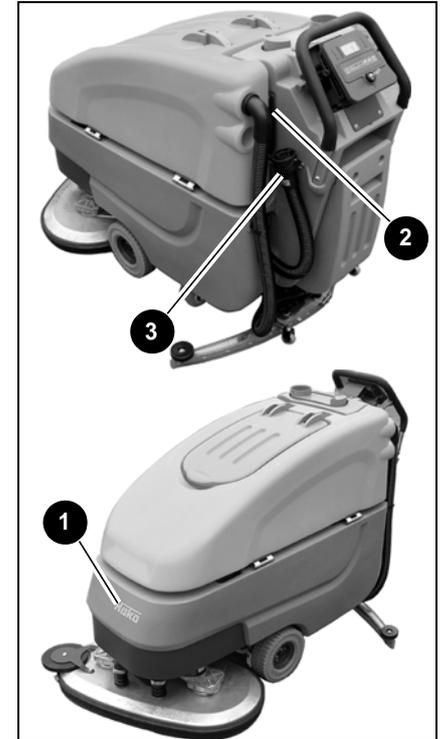
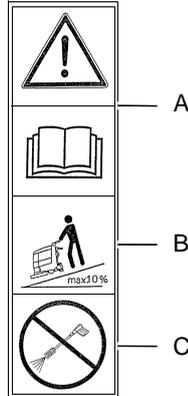


Fig.1

First Operation

2 First Operation

2.1 Instruction

Instruction is required before first operation. First instruction into handling of the machine must be held by a qualified person sent by your local Hako contract dealer. Your Hako dealer will be informed by the manufacturer upon delivery of the vehicle and will contact you to make a date for instruction.

2.2 Initial charging procedure



Before first operation of the machine, fully charge the battery with an initial charging procedure and comply with the operating instructions of the charger as well as with those of the battery manufacturer.

Hako cannot be held liable for damages resulting from an insufficient initial charge.

2.3 Before Putting into Operation

Complete the following inspections before taking the machine into operation:

1. Check the area around the machine for signs of leakage. Hoses, lines and tanks must be free from any leakage or damage.
2. Install brushes and squeegee, see maintenance chapter.
3. Install batteries and connect battery plug, see maintenance chapter.
4. Check battery charge and proceed to re-charging of batteries if required. Generally proceed to initial charging before first operation of the machine.
5. Empty recovery tank and clean it if required, see maintenance chapter.
6. Re-fill solution tank and add cleaning agent according to the manufacturer's recommendations.



Use only cleaning agents suitable for automatic machines (low-foaming) and comply with the instructions for use, disposal and with the warning information specified by the cleaning agent's manufacturer.

2.4 Start Machine



Before start of the machine, leave accelerator level to neutral position.

Proceed with the following to set the machine into operating mode:

- Disconnect mains plug of the charger from outlet and fasten to holder.
- Switch on machine by actuation of key switch from position (0) to position (1).

First Operation

2.5 Operation

1. Switch the machine on with the key switch.
2. Set the machine to standby by actuating the button (Fig. 4/16). The following functions are activated:
 - the squeegee is lowered,
 - the brush head is lowered.
3. Set the working speed and direction of travel using the throttle (Fig. 5/1). The following functions are activated:
 - the brush head motors are switched on,
 - the fresh water supply is activated.
4. If necessary, set the brush pressure with the button (Fig. 4/17) and fresh water flow rate with the button (Fig. 4/13).



Start moving machine immediately after switch on the brush head, otherwise the brushes leave traces on the floor. Lift the brush head before moving over steps and other obstacles.

2.6 Stop Machine

If release the accelerator lever, this re-

turns automatically into the neutral position. The machine stops. Protect the machine against unintentional movements or against being inadvertently started.

2.7 After Work

1. Ride machine to suitable site for maintenance.
2. Stop machine, lift squeegee and brush head and remove the key.
3. Empty and clean recovery tank.



Observe the legal directives and local regulations for disposal of detergents.

4. Check fresh water filter.
 5. Check seals and suction hose.
 6. Check operating fluid levels, function and setting.
 7. Charge batteries.
 8. Clean the machine.
- Empty the fresh water tank before shutting down the machine for a longer time.



Do not clean the electrical parts by means of high-pressure cleaning equipment.

2.8 Transport rides

To move the machine to the place where it is to be used, switch it on, lift-out squeegee and brush head and actuate the accelerator switch according to the desired direction of travel.

2.9 Tie-down points

In case of transport on a vehicle or trailer, the machine has to be protected against rolling off. Tie the machine down firmly by lashing it to the front with the eye bolts (Fig. 2/1) and to the rear with the chassis (Fig. 2/2).

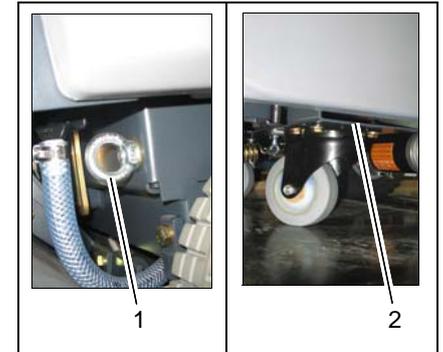


Fig.2

3 Operation

3.1 Method of operation

General

The Scrubmaster B90 CL is a vacuum scrubbing machine for wet cleaning of hard-surfaced floors.

3.1.1 Brush Head

Lower brush head (Fig. 3/1) via tip switch before scrubbing. The brushes rotate and water supply switches on automatically. With the accelerator lever in neutral position (machines stopped) brushes and water supply switch off automatically.

3.1.2 Fresh Water Tank

Fill the fresh water tank (Fig. 3/2) after folding up the opening. The fresh water tank holds 90 litres and the filling level can be followed optically (through transparent hose). Regulation of water amount is available via adjustment handle.



Fig.3

3.1.3 Squeegee

The movable squeegee (Fig. 3/3) consists of the squeegee lift-out, the suction turbine and sealing strips. The soiled water is wiped from the floor by means of sealing strips. Squeegee is lowered via tip switch. Simultaneously, the suction turbine switches on. The suction turbine works independent of direction of travel and even if the machine stops. Second actuation of the tip switch lifts the squeegee up again and suction turbine is automatically switched off with a delay of 15 seconds.

3.1.4 Soiled Water Tank

The soiled water is taken from squeegee to the soiled water tank (Fig. 3/4) by suction turbine and suction hose. For cleaning and collecting water at places where access is difficult, the machine can be equipped optional with handheld suction hose.

3.1.5 Travel Drive

The machine features a continuous travel drive (Fig. 3/6). The electronic travel drive control realises modification of travel speed, direction as well as dynamic braking.

3.1.6 Batteries and Charger

The machine is equipped with an automatic charger unit (Fig. 3/7) and a low discharge signal sender (LDS) for protection against low discharge. Information on drive batteries (Fig. 3/5), see leaflet 88-60-2556.

3.1.7 Options

- Dosage system and floater unit for automatic filling
- Extraction hose including suction pipe, joint nozzle and wet suction nozzle
- Mop holder and tool-box for cleaning utensils
- Silence Kit for soundproofed operation
- Privat-Label for additional labels.
- Scrubbing tool
- Handheld suction hose



Accessories such as brushes, rollers, pads, pad holder with centerlock and sealing strips you find in our spare parts catalogue in the Internet under www.hako.com

Operation

3.2 Operating and Indicating Elements

3.2.1 Operating Panel

- 1 Display
- 2 Key switch
- 3 Battery charge indication
- 4 LDS indicator
- 5 Symbol brush drive
- 6 Symbol suction turbine drive
- 7 Hourmeter
- 8 Symbol Service indicator
- 9 Symbol Parking brake
- 10 Symbol Silence Kit (optional)
- 11 Symbol fresh water dosage
- 12 Tip-switch Silence Kit (optional)
- 13 Tip-switch fresh water dosage
- 14 Tip-switch fresh water supply On/Off
- 15 Symbol vacuum scrubbing tool (optional)
- 16 Tip-switch brush head and suction turbine
- 17 Tip-switch brush ground pressure
- 18 Tip-switch brush drive
- 19 Tip-switch squeegee and suction turbine

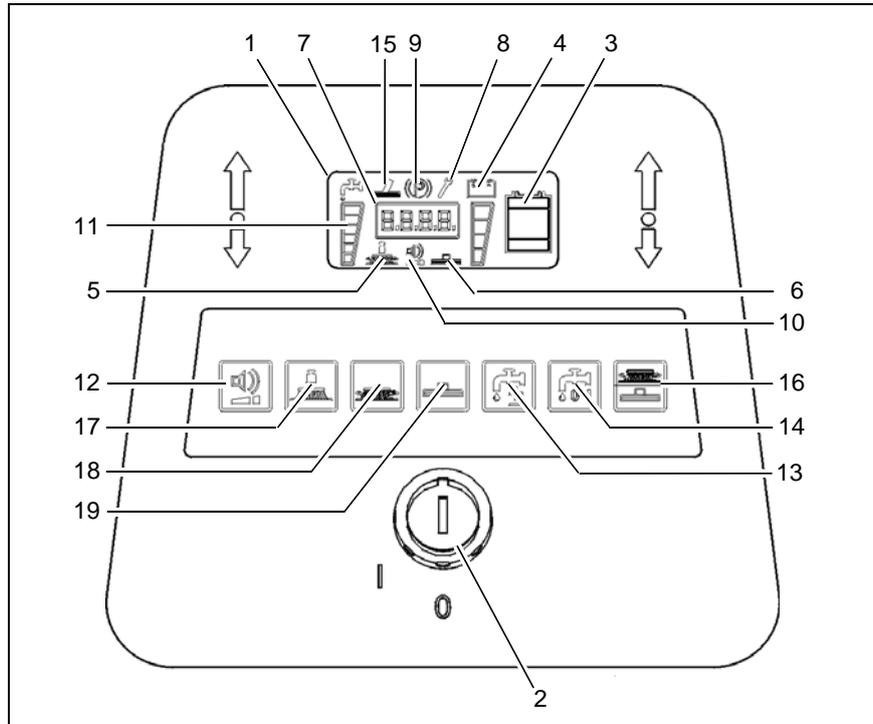


Fig.4

Operation

Display (Fig. 4/1)


This panel allows centralized monitoring of functions and detection of all available operating modes.



The key switch turns the electrical system on and off.



Remove the key to avoid unauthorized use of the machine.



Battery charge indication (Fig. 4/3)

Battery charge indication appears on the panel during the charging procedure and shows the current charge condition of batteries during the procedure. The following symbols appear:

Battery symbol A < charge of 20 %

Battery symbol B = charge of 80 %

Battery symbol C = charge of 100 %

Battery symbol D (flashes) = error



LDS indicator (Fig. 4/4)

Upon switching on, the LDS indication is output on the panel to show the current battery charge condition during operation. Additional Information see chapter maintenance.



Symbol brush drive (Fig. 4/5)

This symbol appears when brush drive is switched on.



Symbol suction turbine drive (Fig. 4/6)

This symbol appears when suction turbine drive is switched on.



Hourmeter (Fig. 4/7)

Upon switching on, the hourmeter briefly displays the software version and the last error code. Then the current operating hour level is shown.



Service indicator (Fig. 4/8)

The service indicator lights after occurrence of a system error and cleaning or riding procedure is interrupted. In addition to the service indicator, a 4-digit code is displayed on the hourmeter.

Operation



Parking brake symbol (Fig. 4/9)

This symbol appears if control lever is in neutral position and travel drive will be locked.



Silence Kit tip symbol (optional) (Fig. 4/10)

This symbol appears when Silence Kit tip-switch is switched on.



Fresh water dosage symbol (Fig. 4/11)

This symbol appears upon actuation of the fresh water dosage tip-switch.



Silence Kit tip-switch (optional) (Fig. 4/12)

This tip-switch is used to change suction turbine to silent mode. The silent mode symbol appears in the display.



Fresh water dosage tip-switch (Fig. 4/13)

This tip-switch is used to regulate the amount of fresh water. Additionally, fresh water amount is adapted to driving speed. The display shows a six-stage symbol for the supplied amount of fresh water.




Fresh water supply ON/OFF tip-switch (Fig. 4/14)

This tip-switch is used to switch fresh water supply ON or OFF.



Scrubbing tool symbol (optional) (Fig. 4/15)

This symbol appears when scrubbing tool-switch (A) is switched on

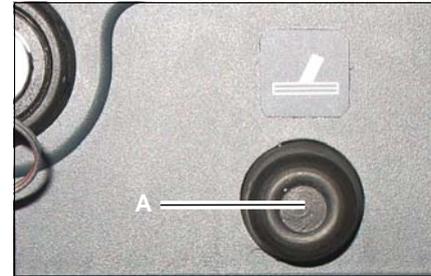

Hand cleaning tool (optional)

Hand-cleaning tool with spray function for the Scrubmaster with scrubbing tool connection for thorough cleaning on areas which are difficult to reach.

Operation



Tip-switch brush head and suction turbine (Fig. 4/16)

This tip-switch (Hako tip-switch) is used to switch the brush drive and the suction turbine ON and OFF with simultaneous lifting/lowering of the brush head and the squeegee. The last water dosage is activated.



Tip-switch squeegee and suction turbine (Fig. 4/19)

This tip-switch is used to lower/lift-out the squeegee and to switch the suction turbine ON and OFF.



Tip-switch brush ground pressure (Fig. 4/17)

This tip-switch is used to adjust brush ground pressure.



Tip-switch brush drive (Fig. 4/18)

This tip-switch is used to switch the brush drive and the water flow with simultaneous lowering of the brush head ON and OFF.

Operation

3.2.2 At the machine

- 1 Accelerator lever
- 2 Opening of fresh water tank
- 3 Soiled water vacuum hose
- 4 Fresh water filter
- 5 Soiled water drain hose
- 6 Fresh water level indication
- 7 Brush ejector
- 8 Power connection charger unit

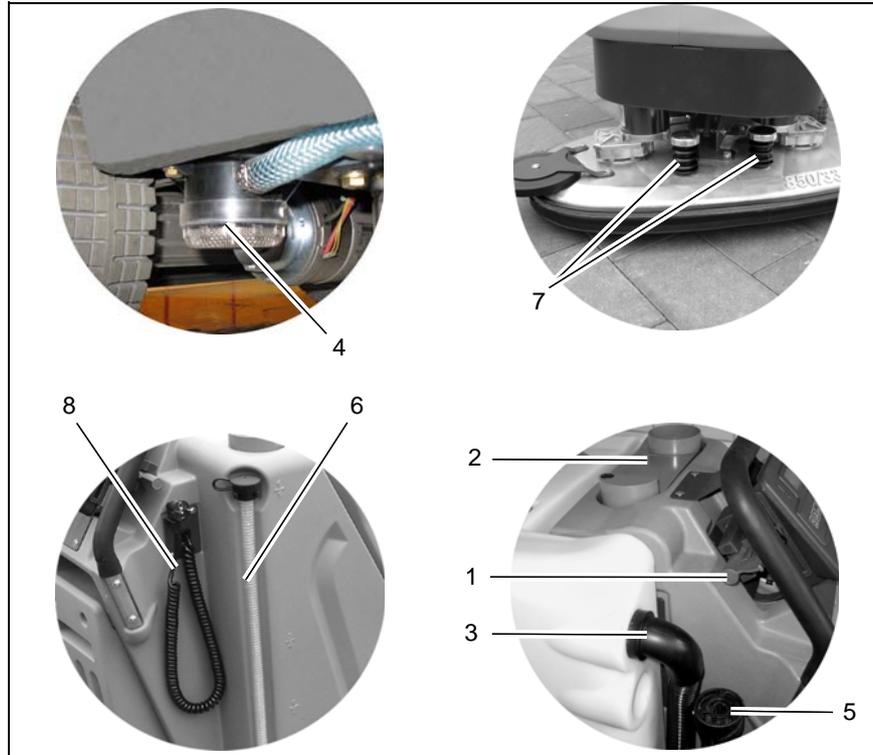


Fig.5

Operation

Accelerator lever (Fig. 5/1)

With the machine being switched on, the accelerator lever allows continuous regulation of speed. If pulled to maximum position, maximum speed is attained. Reduce speed by taking the lever slowly back. If released, the lever automatically returns into neutral position and the machine stops (deadman function). The parking brake of the travel drive is activated. The symbol of the parking brake appears in the display.



Protect the machine against rolling off before leaving it unattended. Before switching the machine on again, make sure that the accelerator lever is in neutral position.

Opening of fresh water tank (Fig. 5/2)

The fresh water tank is filled after folding up the opening.

Soiled water vacuum hose (Fig. 5/3)

This hose transports the soiled water from squeegee to soiled water tank.

Fresh water filter (Fig. 5/4)

While fresh water flows from tank to squeegee, it is cleaned by the filter element.

Soiled water drain hose (Fig. 5/5)

This hose allows draining the collected soiled water from the tank.

Fresh water drain hose (Fig. 5/6)

This hose allows draining the fresh water tank.

Brush ejector (Fig. 5/7)

The brush ejector makes brush removal fast and easy.

Power connection charger unit (Fig. 5/8)

The power connection supplies the charger unit with power.

Operation

Dirt hopper guiding rail (Fig. 6/1)

The dirt hopper located at the cylindrical broom head is fastened by a guiding rail. This dirt hopper may be easily removed for cleaning.

Lever for cylindrical broom seating (Fig. 6/2)

This lever (both sides) is used to release/lock the cylindrical broom seating. The cylindrical brooms may be easily removed without tools.

Swing aside squeegee

Swing aside the squeegee in lifted-out condition to allow passage through narrow clearances. This can be done by foot or by hand by swinging the squeegee to the left in the area of the deflector bail / deflector roller until the locking pin (Fig. 6/3) catches. In order to release locking of the squeegee, activated the tip switch (Fig. 4/19).

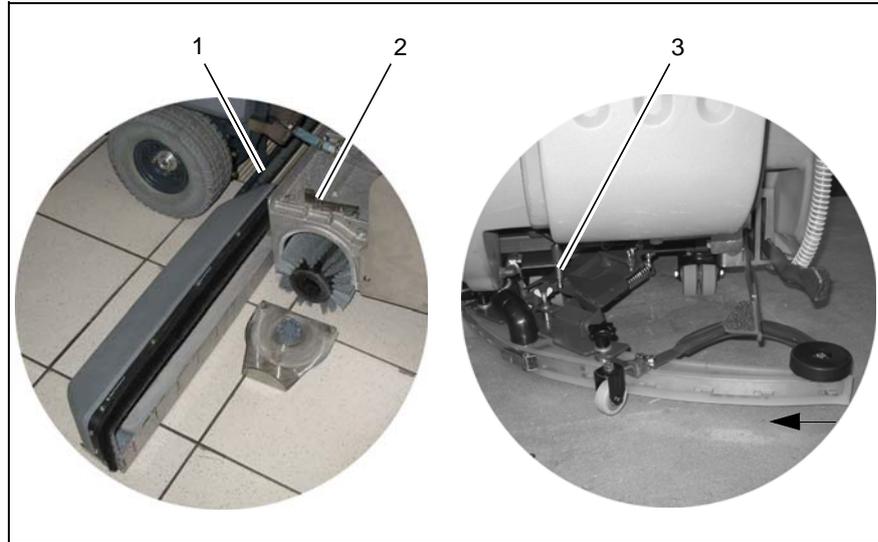


Fig.6

- 1 Dirt hopper guiding rail
- 2 Lever for cylindrical broom seating
- 3 locking pin

Technical Data

4 Technical Data

	Metric unit	Plate brush 85	Roll brush 70
Machine length	cm	172	164
Machine height	cm	111	111
Machine width without Squeegee	cm	88	76
Machine width with Squeegee	cm	110	110
Working width	cm	85	70
Squeegee width	cm	110	110
Surface performance theoretical	m ² /h	3400	2800
Service voltage	V	24	24
Nominal power drive motor	W	430	430
Nominal power suction motor	W	520	520
Nominal power brush motor	W	2x935	2x875
Number of brushes	Qty.	2	2
Diameter of brushes	cm	43	15
Work ride	km/h	5	5
Fresh water tank	litres	85	85
Soiled water tank	litres	85	85
Weight without Batteries and water	kg	225	200
Weight with water and Batteries	kg	524	499

Technical Data

Noise emission	Metric unit	Standard	Soundproofing pack	Soundproofing pack/ Silence Kit
The sound pressure level measured under maximum conditions of use (L _{WA}) according to DIN EN 60335-2-72 amounts to:	dB (A)	82	80	79
The sound pressure level measured (at the ear of the driver) under normal conditions of use (L _{pA}) according to DIN EN 60335-2-72 amounts to:	dB (A)	67	65	63
Measurement inaccuracy (K _{pA}):	dB (A)	1,6	1,6	1,6
Vibration				
The frequency weighted acceleration measured according to DIN EN ISO 5349 which have an effect upon the upper limbs (hand-arm-system) amounts under normal working conditions:	m/s ²	< 2,5	< 2,5	< 2,5

5 Maintenance and Care

General



Before proceeding to maintenance and care work you are advised to read and comply with the Safety Information chapter!

Compliance with the recommended maintenance works will give you the certitude of always having a reliable machine at disposition.

Daily or weekly maintenance and repair works may be executed by the driver/operator having been trained accordingly. Further Hako system maintenance works have to be executed by qualified personnel only. Please contact your local Hako Service Centre or Hako contract dealer. We cannot be held liable for damages resulting from non-compliance with these instructions.

Please indicate the machine's serial number with any enquiry or spare part order, see paragraph 1.7 - Nameplate.

5.1 Hako System Maintenance

The Hako System Maintenance:

- guarantees reliable operability of the Hako machines (preventive maintenance)

- minimizes operating costs, repair costs and maintenance costs
- ensures long service life and operability of the machine

The Hako System Maintenance is structured in separate modules and determines specific technical works to be executed as well as the intervals for such maintenance works. For any specific maintenance type, the replacement parts are determined and listed in spare part kits.

Hako System Maintenance K:

To be performed by the customer in accordance to the maintenance and care instructions contained in the operating instructions (daily or weekly). The driver/operator will be instructed upon delivery of the machine.

Hako-System Maintenance I :

(every 125 hours of operation)
To be performed by qualified personnel of authorised Hako Service Centre in accordance with the machine-specific system maintenance including spare part kit.

Hako-System Maintenance II:

(every 250 hours of operation)
To be performed by qualified personnel

of authorised Hako Service Centre in accordance with the machine-specific system maintenance including spare part kit.

Hako-System Maintenance S:

(every 500 hours of operation safety check)

To be performed by qualified personnel of authorised Hako Service Centre in accordance with the machine-specific system maintenance including spare part kit. Execution of all safety-relevant inspections according to UVV-BGV-TÜV-VDE as prescribed by law.

Maintenance and Care

5.2 Maintenance Document

<p>Handing over</p> <p>Upgrade Test drive Handing over to the customer Instruction carried out on: at _____ operating hours</p>	<p>Hako-System-Maintenance I 125 operating hours Workshop stamp</p> <p>carried out on: at _____ operating hours</p>	<p>Hako-System-Maintenance II 250 operating hours Workshop stamp</p> <p>carried out on: at _____ operating hours</p>	<p>Hako-System-Maintenance I 375 operating hours Workshop stamp</p> <p>carried out on: at _____ operatin hours</p>
<p>Hako-System-Maintenance S 500 operating hours Workshop stamp</p> <p>carried out on: at _____ operating hours</p>	<p>Hako-System-Maintenance I 625 operating hours Workshop stamp</p> <p>carried out on: at _____ operating hours</p>	<p>Hako-System-Maintenance II 750 operating hours Workshop stamp</p> <p>carried out on: at _____ operating hours</p>	<p>Hako-System-Maintenance I 875 operating hours Workshop stamp</p> <p>carried out on: at _____ operatin hours</p>
<p>Hako-System-Maintenance S 1000 operating hours Workshop stamp</p> <p>carried out on: at _____ operating hours</p>	<p>Hako-System-Maintenance I 1125 operating hours Workshop stamp</p> <p>carried out on: at _____ operating hours</p>	<p>Hako-System-Maintenance II 1250 operating hours Workshop stamp</p> <p>carried out on: at _____ operating hours</p>	<p>Hako-System-Maintenance I 1375 operating hours Workshop stamp</p> <p>carried out on: at _____ operating hours</p>

Maintenance and Care

5.3 Maintenance Schedule Hako-System Maintenance Customer

The daily and weekly maintenance intervals are to be performed by the customer/operator.

To be performed	Interval	
	daily	weekly
Fill clear water tank and proceed to chemical agent dosage	o	
Charge batteries	o	
Check brush head and clean if required	o	
Check squeegee and clean if required	o	
Clean tank lid sealing of the soiled water tank	o	
Empty soiled water tank. Clean soiled water tank and suction filter	o	
Check brushes/pads and replace if required		o
Clean suction hose of soiled water tank		o
Check squeegee sealing strips and eventually turn round or replace		o
Clean drain hose of clear water tank		o
Check clear water supply to brushes and clean if required		o
Check water filter and clean if required		o
Test drive and function test		o

Maintenance and Care

Hako-System Maintenance I

The following maintenance works are to be performed by an authorised Hako Service workshop.

To be performed	Interval
	every 125 hours of operation
Check battery charger	o
Check tank lid sealing of the soiled water tank and replace if required	o
Check drain hose of the soiled water tank and replace if required	o
Grease joints at the brush lift-out	o
Check wheel fixing screws and tighten (32 Nm) if required	o
Check condition of tyres	o
Grease joints at the squeegee holder	o
Test drive and function test	o

Maintenance and Care

Hako-System Maintenance II

The following maintenance works are to be performed by an authorised Hako Service workshop.

To be performed	Interval
	every 250 hours of operation
Perform maintenance works according to Hako-System Maintenance I	o
Inspect steering rollers for tread damages and bearing slackness and replace if required	o
Check drain hose of the soiled water tank and replace if required	o
Check deflector roller of the brush head and replace if required	o
Check suction hose for tight fitting and damages and replace if required	o
Check supporting wheel of the squeegee and replace if required	o
Test drive and function test	o

Maintenance and Care

Hako-System Maintenance S (Safety check)

The following maintenance works are to be performed by an authorised Hako Service workshop at least once yearly.

To be performed	Interval
	every 500 hours of operation
Perform maintenance works according to Hako-System Maintenance II	o
Clean travel drive motor from carbon dust and check carbon brushes for smooth operation and wearing and replace carbon brushes if required	o
Clean brush motors from carbon dust and check carbon brushes for smooth operation and wearing and replace carbon brushes if required	o
Test drive and function test	o

Maintenance and Care

5.4 Battery Systems

- 1 LDS display
- 2 Charger indicator
- 3 Charger
- 4 Mains cable charger
- 5 Battery plug
- 6 Batteries
- 7 Soiled water tank
- 8 Support
- 9 Wiring diagram



Handling and changes of the batteries may take place only by maintenance staff.

During operation, the TSG indicator displays the battery charge status. When the batteries are empty, the battery icon flashes and an acoustic warning signal is issued. The machine functions are restricted. Drive to a charging station immediately.!

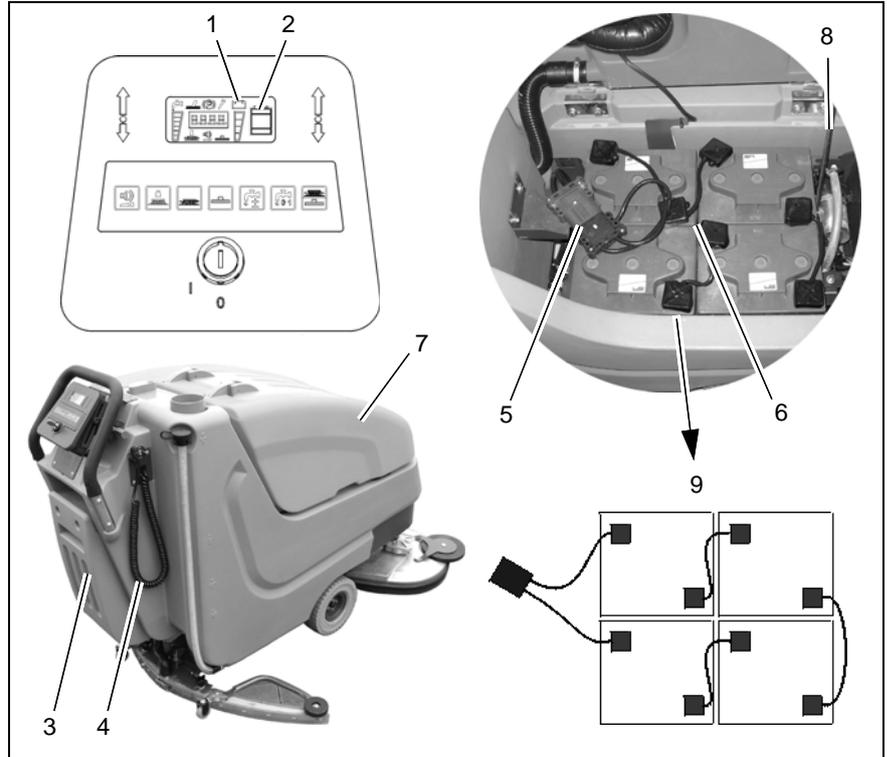


Fig.7

5.4.1 Charge Batteries

Use the integrated battery charger (Fig. 7/3) to charge batteries. Proceed to connection of the charger by means of the mains cable (Fig. 7/4) with safety plug. Charging batteries is recommended if at least one bar of the LDS display has extinguished after operation of the machine. On this behalf you are requested to observe the operating instructions of the charger 88-60-2723 as well as the operating instructions of the battery manufacturer.



Proceed to proper initial charging of the used batteries before first operation of the machine. Hako cannot be held liable for battery damages resulting from non-execution of initial charging. In case it is intended to change the type of battery the charger has to be adjusted only by Hako contract workshops. Provide for sufficient ventilation of areas where batteries are charged. – Explosion hazard!

5.4.2 Low Discharge Signal sender (LDS)

The machine has been equipped with a charge indicator to preclude the batteries from low discharge. This low discharge signal sender has been integrated into the electronics. If other batteries are used, re-adjustment of the low discharge signal sender is required.



Only Hako contract workshops are authorised to proceed to adjustment of the low discharge signal sender.

5.4.3 Maintenance of Drive Batteries

Refer to operating instructions 88-60-2556 for information on care of drive batteries.

5.4.4 Remove Batteries

1. Park machine on level ground.
2. Switch off machine by key switch.
3. Open empty soiled water tank (Fig. 7/7) and secure by support (Fig. 7/8).
4. Disconnect battery plug (Fig. 7/5).
5. Disconnect battery connection cables.
6. Remove batteries.

5.4.5 Install Batteries



Due to alteration of the centre of gravity, only use batteries as released and at the prescribed position only.

1. Switch off machine by key switch.
2. Open empty soiled water tank (Fig. 7/7) and secure by support (Fig. 7/8).
3. Place batteries into trough according to figure.
4. Connect battery poles and enclosed connecting cables according to wiring diagram (Fig. 7/9). Provide for tight fitting and grease poles.

5.4.6 Disposal of Batteries

Used batteries labelled by the recycling sign contain re-usable substances. According to the labelling by crossed dustbin, such batteries must not be added to normal household waste. Contact your local Hako contract partner for return and recycling according to § 8 BattV!

Maintenance and Care

5.5 Solution Tank

- 1 Solution tank
- 2 Marker
- 3 Fill level hose
- 4 Solution filter
- 5 Tank lid

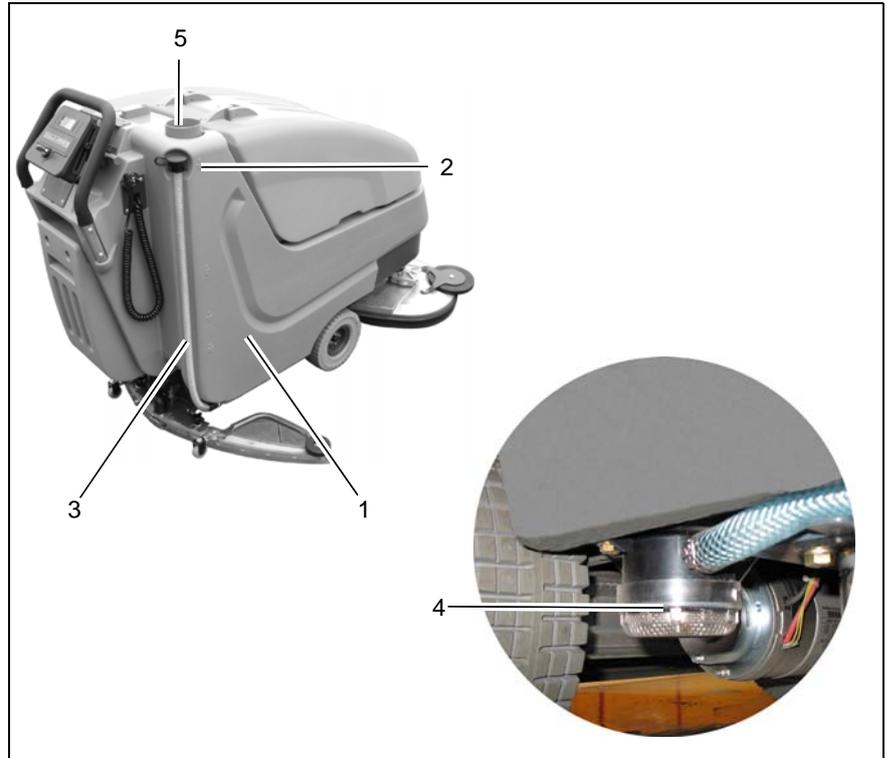


Fig.8

Maintenance and Care

5.5.1 Fill Solution Tank

Fill solution tank (Fig. 8/1) before work or as required. Park vehicle on level ground. Open tank lid (Fig. 8/5) and fill tank up to the maximum (1/1 marker) (Fig. 8/2).

Alternatively, filling of the machine via quick coupling (Fig. 8/6) is available. Before doing so, connect the filling hose of the dosage unit and the quick coupling. The floater valve automatically closes after the maximum filling level has been attained.

(Refer to specific operating instructions for information on operation of the dosage unit)

The maximum admissible service pressure of the floater unit is 6bar.

5.5.2 Empty Solution Tank

Park vehicle such that the fill level hose (Fig. 8/3) is located above the drain aperture in the floor. Take fill level hose from holder and remove lid.

5.5.3 Clean Solution Filter

Check solution filter (Fig. 8/4) at weekly intervals and clean or replace if required.



Only clean solution filter with emptied solution tank.

1. Empty solution tank (Fig. 8/1) entleeren, see paragraph 5.5.2.
2. Unscrew filter cap.
3. Remove the filter element from the filter case for cleaning. Replace if required.
4. Re-install filter element and filter cap.

5.6 Soiled Water Tank

- 1 Soiled Water Tank
- 2 Drain hose
- 3 Suction filter
- 4 Tank lid

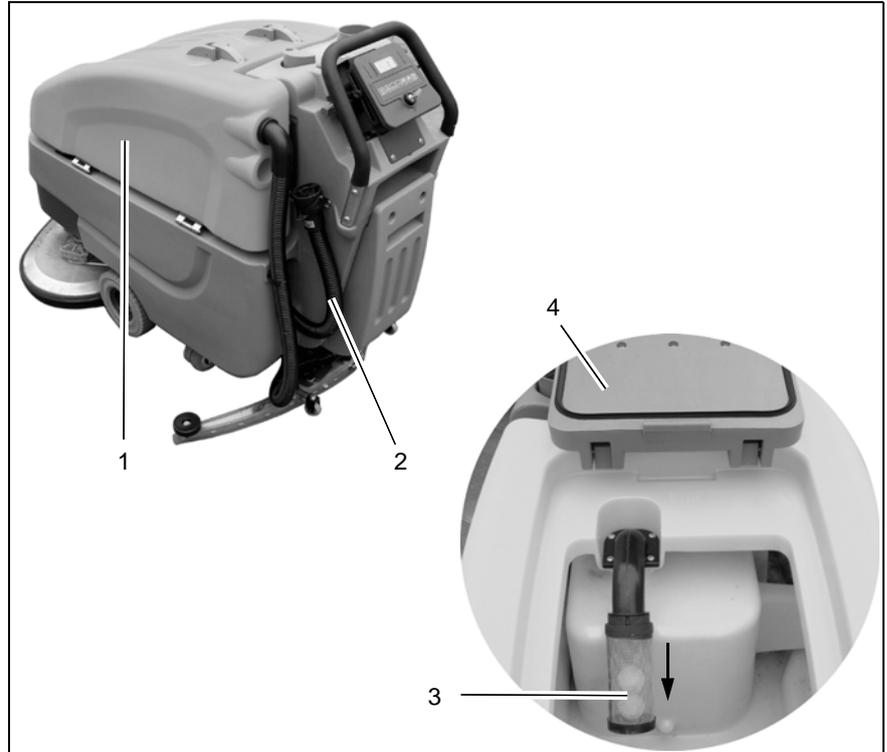


Fig.9

Maintenance and Care

5.6.1 Empty Soiled Water Tank

Clean soiled water tank (Fig. 9/1) at daily intervals, as required or upon acoustic signal (increased suction turbine speed).

1. Take machine to appropriate place for discharge.
2. Park machine such that drain hose attains drain aperture in the floor.
3. Switch off machine.



Observe the legal provisions and the local regulations for disposal of detergents!

4. Take drain hose (Fig. 9/2) from holder and empty soiled water tank completely.

5.6.2 Clean Soiled Water Tank

Clean soiled water tank (Fig. 9/1) at daily intervals or as required.

1. Empty soiled water tank, see paragraph 5.6.1.
2. Open tank lid (Fig. 9/4) of the soiled water tank.
3. Take drain hose (Fig. 9/2) from holder and empty soiled water tank completely.
4. Remove remaining dirt by rinsing with clear water.
5. Rinse drain hose as well.

5.6.3 Clean Suction Filter

Check suction filter (Fig. 9/3) for function at daily intervals and clean if required. The suction filter is clipped and can be easily removed.

Maintenance and Care

5.7 Plate brush head

- 1 Toggle-type fastener
- 2 Brush head
- 3 Brush ejectors
- 4 Deflector roller
- 5 Sealing strip

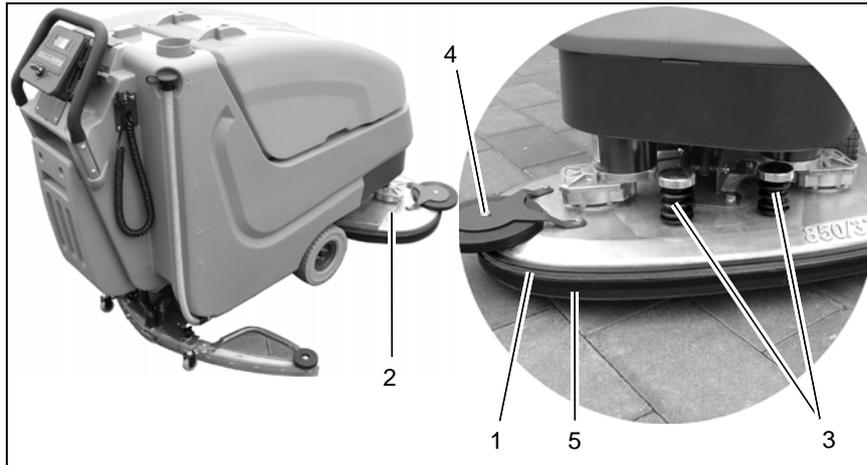


Fig.10

5.7.1 Clean Brushes

Clean brushes of the brush head (Fig. 10/2) at daily intervals or as required. Press brush ejectors (Fig. 10/3) down to remove brushes for cleaning.

5.7.2 Change Brushes

Check brushes of the brush head for wearing at weekly intervals. Replace brushes if bristles are worn down to a length of 1.5 cm.

1. Press brush ejectors (Fig. 10/3) down to remove old brushes.
2. Push new brush under brush head and use both hands to press it into seating.

5.7.3 Change Deflector Roller

Check deflector roller (Fig. 10/4) at weekly intervals or replace as required.

5.7.4 Change Sealing Strip

Check sealing strip (Fig. 10/5) at weekly intervals or as required. Before doing so, open toggle-type fastener (Fig. 10/1) and remove sealing strip. Proceed to mounting in inverse order.

Maintenance and Care

5.8 Roll brush head

- 1 Brush tothing
- 2 Dirt hopper
- 3 Roll brush head
- 4 Deflector rollers
- 5 Quick-release
- 6 Feed inlet
- 7 Brush seating
- 8 Locking lever

5.8.1 Clean dirt hopper

Clean dirt hopper (Fig. 11/2) at daily intervals or as required.

Remove dirt hopper from the right machine side (seen in direction of travel). Use quick-release (Fig. 11/5) to loosen feed inlet (Fig. 11/6) and clean dirt hopper.

5.8.2 Remove brushes

1. Release brush seating (Fig. 11/7) by locking lever (Fig. 11/8).
2. Remove brush seating by lowering and removing it to the front.
3. Remove and check the brushes.

5.8.3 Clean brushes

Clean brushes in the brush head at daily intervals or as required.

5.8.4 Fit brushes

Check brushes in the brush head for wearing at weekly intervals and replace as required.

1. Insert brush into brush head and let it catch (brush tothing (Fig. 11/1)) as to point to the outside).
2. Place brush seating and lock by lever.

5.8.5 Change deflector roller

Check deflector rollers (Fig. 11/4) at weekly intervals and replace if required.

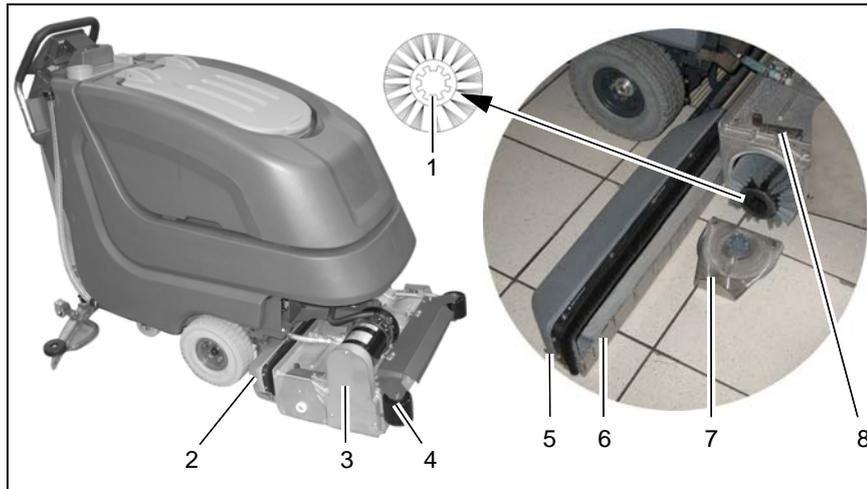


Fig.11

Maintenance and Care

5.9 Squeegee

- 1 Squeegee
- 2 Star-shaped knob
- 3 Eccentric wheel for angle adjustment
- 4 Suction hose
- 5 Fastening device
- 6 Washers for height adjustment

5.9.1 Cleaning the Squeegee

Check the squeegee (Fig. 12/1) daily and clean it as necessary. To clean it lift the squeegee out, pull off the suction hose (Fig. 12/4), loosen the two star-shaped knobs (Fig. 12/2) and remove the squeegee.

5.9.2 Changing the Sealing Strips

Check the inner and outer sealing strips on the squeegee (Fig. 12/1) weekly for signs of wear. The sealing strips can be used fourfold by turning them.

1. Lift the squeegee out.
2. Pull off the suction hose, loosen the two star-shaped knobs and remove the squeegee.
3. Unlock the fastening device (Fig. 12/5) and remove the outer sealing strip. Turn the sealing strip or install a new one, as necessary. Change the inner sealing strip in the same way.

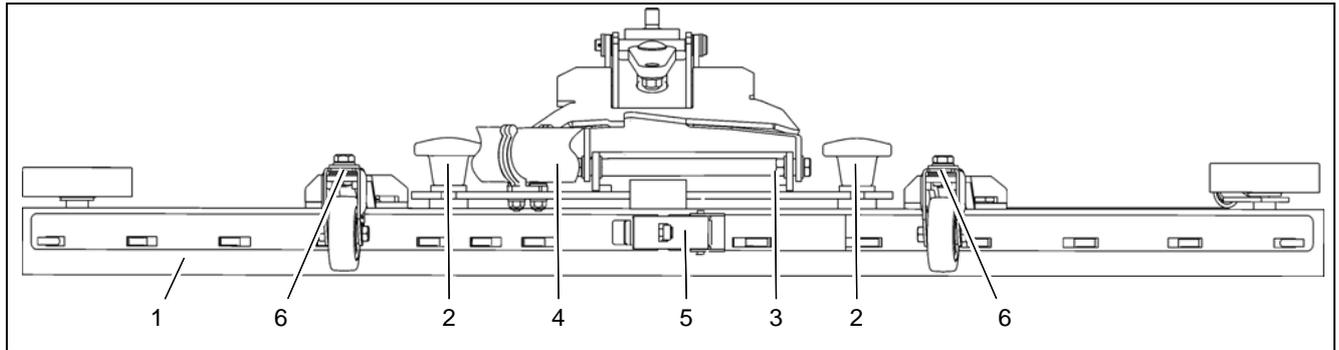


Fig.12

Maintenance and Care

5.9.3 Adjusting the Sealing Strips Angle Adjustment

The angle adjustment is the decisive factor in ensuring that the sealing strips on the squeegee lie evenly on the floor.

1. Park the machine on a level surface and lower the squeegee.
2. Loosen the screws on the eccentric wheel (Fig. 13/1) and adjust the squeegee using the eccentric wheel (SW13) so that the ends of the sealing strips still have contact with the floor.

Figure A: Turn the eccentric wheel in the front top position: The clearance between sealing strip and floor is reduced in the centre.

Figure B: Turn the eccentric wheel in the behind top position: The clearance between sealing strip and floor is increased in the centre.

3. Switch the machine on and check the suction pattern. When the machine is in operation, the entire surface of the sealing strips (centre and outer areas) must be applied as evenly as possible.
4. Tighten the screws on the eccentric wheel at 5 lb ft.

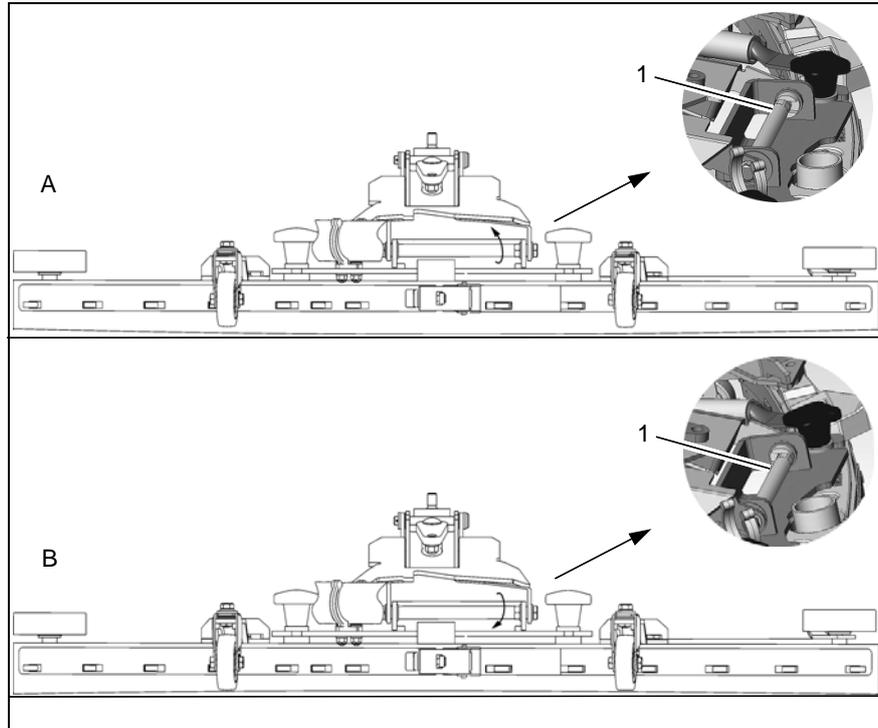


Fig.13

Maintenance and Care

Height Adjustment

The height adjustment is set to 3 mm at the factory. If streaks are produced, despite an optimum angle adjustment, the clearance between the rollers and floor must be adjusted by changing the number of washers on the holder.

In the case of very smooth floors, e.g. finished floors, PVC, linoleum, etc. Number of washers = 2. This corresponds to a clearance of approx. 2 mm.

In the case of very uneven floors, e.g. poorly laid tiles (water does not run off) Number of washers = 4. This corresponds to a clearance of approx. 4 mm.



The Squeegee 110 cm is equipped with two additional rollers which are adjusted at the factory to a distance of 10 mm to the floor by means of spacers.

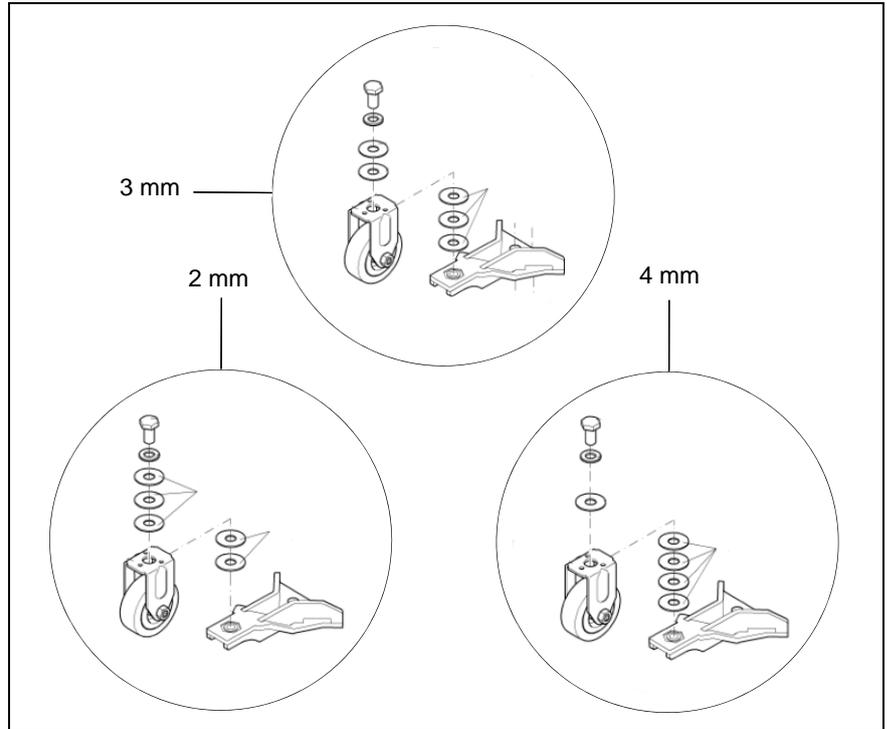


Fig.14

Scrubmaster B90 CL

Changes Due to Machine Directive 2006/42/EC



Clean ahead

Preface

Modified text in paragraph Preface:
Before using the equipment for the first time, read this original manual thoroughly, act according to the information contained and keep it in a safe place for future reference or subsequent owners.

Intended use

Modified text in paragraph Intended Use:

Based on the conception, design and construction of the model introduced onto the market by us, the machine complies with the applicable basic safety and health requirements stipulated in the EC Directive (refer to Declaration of Conformity). This declaration is no longer considered valid in the event of modifications to the machine not authorized by us. The manufacturer is not deemed liable for any damage resulting from unauthorized modifications to the machine.

General safety information

The machine may be used only for operation on plane areas with a maximum inclination of up to 10 %.

Disposal

New text in Chapter Introduction:

Render the machine inoperable. It must not represent a potential source of danger for children.

Dispose of the device according to the applicable local regulations. For further information on handling and recycling, please contact your authorized Hako dealer where you purchased the device.

Used batteries with the recycling symbol contain reusable commodities. The heavy metals contained simultaneously represent a serious risk to health and to the environment. Never open batteries or damage them. Never touch, inhale or swallow any material inside batteries. Health hazard! Never allow batteries to pollute the environment. Risk of contaminating the ground and water! In accordance with the symbol with the crossed out bin, these batteries must not be disposed of in domestic waste.

The return and recycling of old batteries must be agreed on with your authorized Hako dealer in accordance with the Battery Law § 6 and § 8 (BattG)

Noise emission value

The sound pressure level (LpA) (at the ear of the operator) measured according to DIN IEC 60335-2-72 under normal working conditions: 67 dB (A)

Measurement inaccuracy (KpA):

1,6 dB (A)

Sound power level (LwAd) measured according to DIN EN 60335-2-72 under maximum working conditions:

82 dB (A)

Vibration

The weighted effective value of acceleration, measured in accordance with ISO 5349-1, to which the upper parts of the body (hand-arm) are exposed under normal working conditions:

< 2,5 m/s²

The weighted effective value of acceleration, measured in accordance with ISO 2631-1, to which the upper parts of the body (feet-seat) are exposed under normal working conditions:

< 0,5 m/s²

EC Declaration of Conformity (corresponds to EC Directive 2006/42/EC)

Hako GmbH
Hamburger Straße 209-239
D-23843 Bad Oldesloe

declares that the products

Scrubmaster B90 CL, Typ 7062

to which this declaration relates, conform to the relevant provisions of the safety and health requirements stipulated in EC Directive 2006/42/EC and is in accordance with 2004/108/EC.

Reference was made to the following standards and/or norms and/or technical specifications to ensure proper implementation of the safety and health requirements in the EC Directive:

EN 60335-2-72
EN 55012
EN 61000-6-2

Bad Oldesloe, 22.04.2014



Dr. Rainer Bavendiek
Director R&D

Name of the authorized person who compiles technical documents for Hako:

Ludger Lüttel



Spitzentechnik für eine saubere und schönere Umwelt

Advanced Technology for a Cleaner, Better Environment



Hako GmbH • Hamburger Str. 209-239 • D-23843 Bad Oldesloe
Tel. +49 4531 806-0 • Fax +49 4531 806-338